

Pin busbar touch-safe, 10 mm<sup>2</sup> 3-phase, 1016 mm long can be cut, without end caps

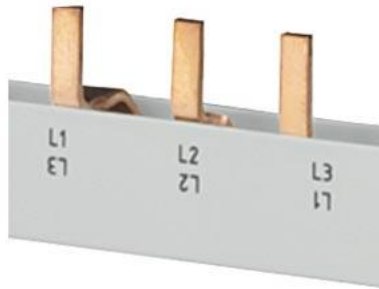


Figure similar

Model	
product brand name	SENTRON
product designation	Pin busbar
design of the product	10 mm <sup>2</sup> , 3PH L1016 mm
General technical data	
phase number	3
cross-section	10 mm <sup>2</sup>
Main circuit	
operational current rated value	63 A
Product details	
product feature insulated	Yes
Connections	
type of electrical connection	Pin
Mechanical Design	
width	14.5 mm
length	1 016 mm
net weight	446.78 g
Approvals Certificates	
General Product Approval	other



[Confirmation](#)

[Miscellaneous](#)



[Confirmation](#)

other

Environment

[Miscellaneous](#)



[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)

### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3740>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3740>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3740](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3740)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

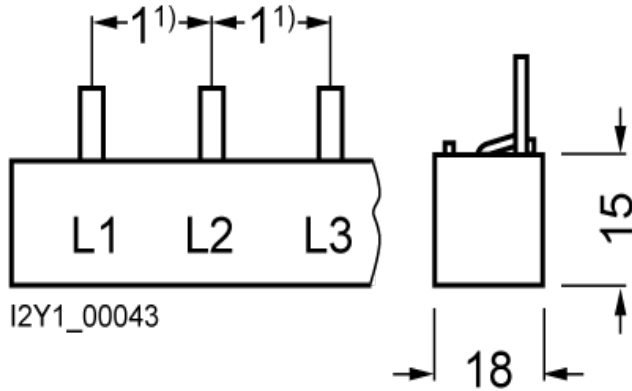

1) Pin spacings in MW (Modular widths, 1 MW = 18

